

DH-HAC-HDW1200CLQ-IL-A

2MP Smart Dual Light HDCVI Fixed-focal Eyeball Camera



System Overview

The Lite Series is a great choice for consumers looking for high quality monitoring products at a reasonable price. Its low cost and high performance make it ideal for residential areas and SMB solutions. This series is equipped with a wide range of technologies, such as full-color and starlight, providing various solutions for different scenarios.

Functions

Smart Dual Light

With its smart dual light mechanism, the camera automatically turns on the white light when Perimeter Protection/SMD Plus function of AI XVR detects a target in the rule area to capture clear, vivid images. When the target leaves the rule area, the camera automatically switches over from the white light to the IR light to significantly reduce light pollution.

Easy Installation

HDCVI eyeball comes with a quick-to-install pedestal, which makes it easier to install than conventional eyeballs and reduces cost on time and labor.

Broadcast-quality Audio

Audio signal transmission over coaxial cables is supported by the HDCVI camera. It adopts a unique audio processing and transmission technology that restores source audio and eliminates noise, ensuring the quality and reliability of the audio information that is collected. This becomes important for video surveillance applications that use audio information as a type of supplementary evidence.

Super Adapt

With its intelligent algorithm, the camera automatically adjusts its parameters to provide optimal performance and vivid images.

Advanced 3DNR

Dahua's advanced 3DNR technology reduces image noise with little to no impact on image sharpness, especially in poor lighting conditions. It detects the noise, and compares the sequential frames to effectively reduce the noise. It also makes efficient use of bandwidth, saving on storage space.

* The parameters and datasheets below can only be applied to 1200-S6-IL series.
* In order to use the Smart Dual Light HDCVI camera, the firmware of XVR must be upgraded to V4.001.000004.1.R.220323 or later version.

- Max. 30 fps@1080p.
- 3D NR.
- Smart Dual Light.
- 20 m illumination distance.
- Super Adapt.
- Built-in mic.
- Quick-to-install eyeball saves installation time.
- 3.6 mm fixed lens (2.8 mm optional).
- CVI/CVBS/AHD/TVI switchable.
- IP67, 12 VDC.



Protection (IP67, Wide Voltage)

IP67: The camera passed a series of rigorous dust and immersion tests. Its enclosure is both dust-proof and waterproof, and can function normally while being immersed in 1 m deep water for up to 30 minutes. Wide voltage: The camera has $\pm 30\%$ input voltage tolerance (for some power supplies) and a wide voltage range, making it suitable for a variety of outdoor scenarios.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.

* Audio input is available for select HDCVI camera models.


Long Distance Transmission

HDCVI technology provides long distance transmission in real time without transmission loss. It supports transmission distances up to 700 m for 2-MP/5-MP/8-MP HD videos through coaxial cables, and up to 300 m through UTP cables. The results were obtained and verified through rigorous testing in Dahua's test laboratory.


Technical Specification						White Balance	Auto;Area white balance	
Camera						Gain Control	Auto	
Image Sensor	2 MP CMOS					Noise Reduction	3D NR	
Max. Resolution	1920 (H) × 1080 (V)					Illumination Mode	Smart IR&WL; WL Mode; IR Mode	
Scanning System	Progressive					Mirror	Yes	
Electronic Shutter Speed	PAL: 1/25 s–1/100000 s NTSC: 1/30 s–1/100000 s					Privacy Masking	Off/On (8 areas, rectangle)	
Min. Illumination	0.01 lux@F2.0 (Color, 30 IRE) 0.001 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)					Certification		
S/N Ratio	>65 dB					Certifications	CE-LVD: EN 62368-1; CE-EMC: EN 55032; EN 55035; FCC: 47 CFR FCC Part 15, Subpart B	
Illumination Distance	IR: 20 m (65.62 ft) Warm light: 20 m (65.62 ft)					Port		
Illuminator On/Off Control	Auto					Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port	
Illuminator Number	2 (Warm light); 2 (IR light)					Audio Input	1 channel	
Angle Adjustment	Pan: 0°–360° Tilt: 0°–78° Rotation: 0°–360°					Power		
Lens						Power Supply	12 VDC ± 30%	
Lens Type	Fixed-focal					Power Consumption	Max 2.6W (12 VDC, IR on)	
Auto Focus	No					Environment		
Lens Mount	M12					Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)	
Focal Length	2.8 mm;3.6 mm					Operating Humidity	<95% (RH), non-condensing	
Max. Aperture	F2.0					Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)	
Field of View	2.8 mm: H: 102°; V: 60°; D: 129° 3.6 mm: H: 83°; V: 48°; D: 105°					Storage Humidity	<95% (RH), non-condensing	
Iris Control	Fixed					Protection	IP67	
Close Focus Distance	2.8 mm: 0.5 m (1.64 ft) 3.6 mm: 0.7 m (2.30 ft)					Structure		
DORI Distance	Lens	Detect	Observe	Recognize	Identify	Casing Material	Plastic	
	2.8 mm	41.1 m (135.83 ft)	16.5 m (42.13 ft)	8.3 m (27.23 ft)	4.1 m (13.45 ft)	Product Dimensions	Φ97.1 mm × 93.8 mm (Φ3.82" × 3.69")	
	3.6 mm	50.9 m (166.99 ft)	20.3 m (66.60 ft)	10.2 m (33.46 ft)	5.1 m (16.73 ft)	Net Weight	0.18 kg (0.40 lb)	
						Gross Weight	0.29 kg (0.64 lb)	
						Installation	Wall mount; ceiling mount; vertical pole mount	
Video								
Video Frame Rate		CVI: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; AHD: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; TVI: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; CVBS: PAL: 960H; NTSC: 960H						
Resolution	1080p (1920 × 1080); 960H (960 × 576/960 × 480)							
Day/Night	Auto(ICR)/Color/B/W							
BLC	BLC; HLC; DWDR							
WDR	DWDR							

Ordering Information

Type	Model	Description
2MP Camera	DH-HAC-HDW1200CLQP-IL-A	2MP Smart Dual Light Eyeball Camera, PAL
	DH-HAC-HDW1200CLQN-IL-A	2MP Smart Dual Light Eyeball Camera, NTSC
Accessories (Optional)	PFA13G	Junction Box
	PFA109	Mount Adapter
	PFB220C	Ceiling Mount Bracket
	PFB205W-E	Wall Mount Bracket
	PFA152-E	Pole Mount Bracket
	PFM800-E	Passive HDCVI Balun
	FM321D	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

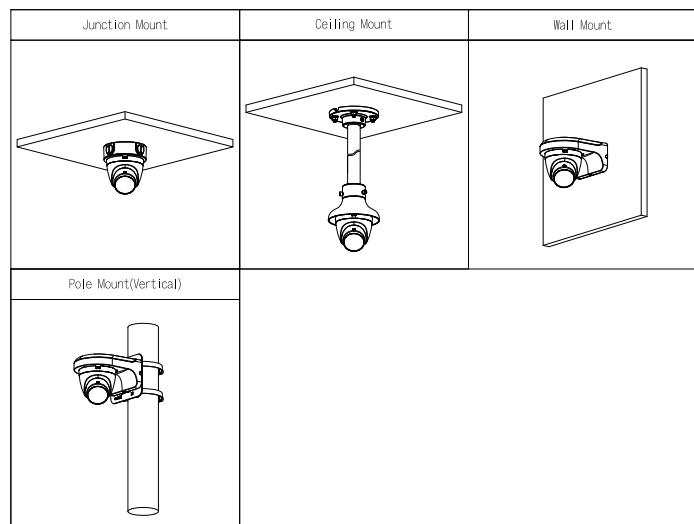

Dimensions (mm [inch])

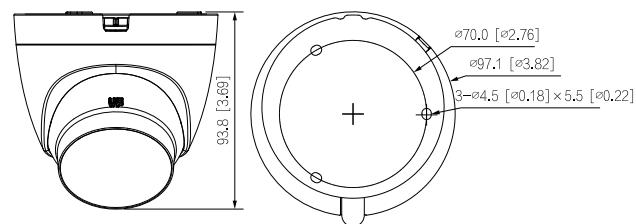

Accessories

Optional:



PFA13G
Junction
Box



PFA109
Mount Adapter



PFB220C
Ceiling Mount
Bracket



PFB205W-E
Wall Mount
Bracket



PFA152-E
Pole Mount
Bracket



PFM800-E
Passive HDCVI Balun



PFM321D
12V 1A Power
Adapter



PFM904
Integrated Mount
Tester

Мегара Секюрити
<https://shop.sotbg.eu>
shop@sotbg.eu
+359889769686