

# Datasheet

# Cloud Easy smart PoE switch

WI-PCES306G| WI-PCES310GF| WI-PCES318GF|  
WI-PCES326GF



Hardware Version: V2.0

## Overview

Wi-Tek Cloud Easy smart PoE switch provides simple, safe, and easy-to-use local WEB and remote management methods and supports smart deployment, abnormal alarm, ONVIF automatic identification of network cameras, automatic shutdown of loop ports, etc. Users can easily use it without professional IT operation and maintenance. Wi-Tek Cloud Easy Smart PoE Switch is the best choice for CCTV and SMB network solution.

## Features

### Support Wi-Tek cloud management

ONVIF cameras and Wi-Tek cloud management devices can be remotely managed through Wi-Tek cloud platform/mobile APP, making CCTV network projects truly intelligent and easy to maintain. You can easily access and manage your cameras from your phone or computer anytime, anywhere.

(Note: The EWEB channel can be created only when the easy smart switch is linked with the other type of Wi-Tek cloud management device, such as cloud L2, L3 management switch, gateway, wireless AP, etc.)

### Automatic Loop Prevention

By default, the switch enables port loop detection. When a loop occurs on the switch, the port which caused the loop will be closed in time to enable the switch to operate properly and maintain service continuity.

### Remote Configuration

No need to go to the site to configure. Users can make some remote configurations such as port restart, PoE restart, VLAN division, and even maintenance and debugging can be done remotely anytime and anywhere.

### Intelligent Operation and Maintenance

Abnormal alarm can help you locate problems quickly, making your operation and maintenance easier.

# Specifications



Model	WI-PCES306G	WI-PCES310GF	WI-PCES318GF	WI-PCES326GF
Hardware Features				
Interfaces				
Downlink Ports	4*10/100/1000 BASE-T RJ45 ports	8*10/100/1000 BASE-T RJ45 ports	16*10/100/1000 BASE-T RJ45 ports	24*10/100/1000 BASE-T RJ45 ports
Uplink Ports	2*10/100/1000Mbps BASE-T RJ45 ports	2*1000Mbps SFP Slots	2*1000Mbps SFP Slots	2*1000Mbps SFP Slots
PoE				
PoE Port	Port 1–4: 802.3af/at PoE Ports	Port 1–8: 802.3af/at PoE Ports	Port 1–16: 802.3af/at PoE Ports	Port 1–24: 802.3af/at PoE Ports
PoE Standard	802.3af/at			
PoE Power Supply Type	End-span			
PoE Pin Assignment	1/2(+), 3/6(-)			
PoE Power	30W Max. for each port, 60W Max. for PoE power budget	30W Max. for each port, 120W Max. for PoE power budget	30W Max. for each port, 240W Max. for PoE power budget	30W Max. for each port, 370W Max. for PoE power budget
Performance				
Memory and Flash	Memory: 128K DDR3 Flash: 16MB			
Switch Property				
Standards and Protocols	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.1x, IEEE 802.1q, IEEE802.1p, IEEE802.3af, IEEE802.3at	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x, IEEE 802.1x, IEEE 802.1q, IEEE 802.1p, IEEE802.3af, IEEE802.3at	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x, IEEE 802.1x, IEEE 802.1q, IEEE802.1p, IEEE802.3af, IEEE802.3at	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x, IEEE 802.1x, IEEE 802.1q, IEEE 802.1p, IEEE802.3af, IEEE802.3at
Forwarding Mode	Store and Forward			
Switching Capacity	12 Gbps	20 Gbps	36 Gbps	52 Gbps
Packet Forwarding Rate	8.93 Mpps	14.88 Mpps	26.78 Mpps	38.68 Mpps



Model	WI-PCES306G	WI-PCES310GF	WI-PCES318GF	WI-PCES326GF
MAC Address Table	8k			
Packet Buffer Memory	4.1Mbit			
Jumbo Frame	9 kB			
Power Supply				
Input Power	AC 100–240V, 50/60Hz			
Power Consumption	Idle: 5W 100% Traffic Rate with PoE: 65 W	Idle: 10W 100% Traffic Rate with PoE: 130 W	Idle: 10W 100% Traffic Rate with PoE: 250 W	Idle: 12W 100% Traffic Rate with PoE: 382 W
Physical Characteristics				
LED Indicators	PWR Indicator: On: the device power on is normal Off: the device is power off or failed  Link Indicator: Off: No device is connected to the corresponding port. On: Indicates the link through that port is successfully established Blinking: Indicates that the Switch is actively sending or receiving data over that port.  PoE Indicator: Off: No PoE powered device (PD) connected. On: There is a PoE PD connected to be port, which supply power successfully. Blinking: Indicates the port is abnormal.  SFP Indicator: On: port connected Off: Port disconnected. Blinking: Data transmission	PWR Indicator: On: the device power on is normal Off: the device is power off or failed  Link Indicator: Off: No device is connected to the corresponding port. On: Indicates the link through that port is successfully established Blinking: Indicates that the Switch is actively sending or receiving data over that port.  PoE Indicator: Off: No PoE powered device (PD) connected. On: There is a PoE PD connected to be port, which supply power successfully. Blinking: Indicates the port is abnormal.  SFP Indicator: On: port connected Off: Port disconnected. Blinking: Data transmission	PWR Indicator: On: the device power on is normal Off: the device is power off or failed  Link Indicator: Off: No device is connected to the corresponding port. On: Indicates the link through that port is successfully established Blinking: Indicates that the Switch is actively sending or receiving data over that port.  PoE Indicator: Off: No PoE powered device (PD) connected. On: There is a PoE PD connected to be port, which supply power successfully. Blinking: Indicates the port is abnormal.  SFP Indicator: On: port connected Off: Port disconnected. Blinking: Data transmission	PWR Indicator: On: the device power on is normal Off: the device is power off or failed  Link Indicator: Off: No device is connected to the corresponding port. On: Indicates the link through that port is successfully established Blinking: Indicates that the Switch is actively sending or receiving data over that port.  PoE Indicator: Off: No PoE powered device (PD) connected. On: There is a PoE PD connected to be port, which supply power successfully. Blinking: Indicates the port is abnormal.  SFP Indicator: On: port connected Off: Port disconnected. Blinking: Data transmission
Buttons	Hold for >5 sec. to restore factory default.			
Fan Quantity	Fanless	1	2	2
Dimensions (W*D*H)	168*94*32mm	220*150*44mm	440*207*44mm	440*207*44mm
Weight	Net Weight: 0.52kg	Net Weight: 1.24kg	Net Weight: 2.4kg	Net Weight: 2.78kg
	Package Weight: 0.83kg	Package Weight: 1.84kg	Package Weight: 3.09kg	Package Weight: 3.46kg
Installation	Desktop	Rack-Mounted	Rack-Mounted	Rack-Mounted




Model		WI-PCES306G	WI-PCES310GF	WI-PCES318GF	WI-PCES326GF
Environmental					
Reliability	Surge Immunity	Common mode $\pm 4\text{kV}$ Differential mode $\pm 2\text{kV}$			
	ESD Protection	Contact discharge $\pm 6\text{kV}$ Air discharge $\pm 8\text{kV}$			
Operating Temperature		-10 °C ~ 50°C(14°F ~ 122°F)			
Storage Temperature		-40°C ~ 70 °C(-40°F ~ 158°F)			
Operating Humidity		10% ~ 90% RH no condensation			
Storage Humidity		5 ~ 90% RH non-condensing			
Certification					
Certification		CE, FCC, RoHS, UKCA, RCM			




Model	WI-PCES306G	WI-PCES310GF	WI-PCES318GF	WI-PCES326GF
Software Features				
Switch Settings	IP Settings			
	User Management			
	Firmware Upgrade			
	Reset			
Monitoring	Reboot			
	Port Statistics			
	Cable Diagnostics			
	Loop Guard			
Switch Settings	Ping Test			
	Port Mirroring			
	Port Isolation			
	Port Reboot			
QoS	Jumbo Frame			
	Static MAC			
	Filter MAC			
	Search MAC			
VLAN Settings	MAC List			
	DHCP Snooping			
	Port Rate			
	Storm Control			
PoE Settings	Port/802.1p/DSCP priority			
	Port-based VLAN			
	VLAN Range: 1–4094			
	PoE port disable			
ONVIF	PD Alive			
	Extend PoE			
Wi-Tek Cloud manage	Automatically identify IP cameras that support ONVIF			
	Cloud management and APP management			

## WI-PCES306G

## Dimensions (mm)

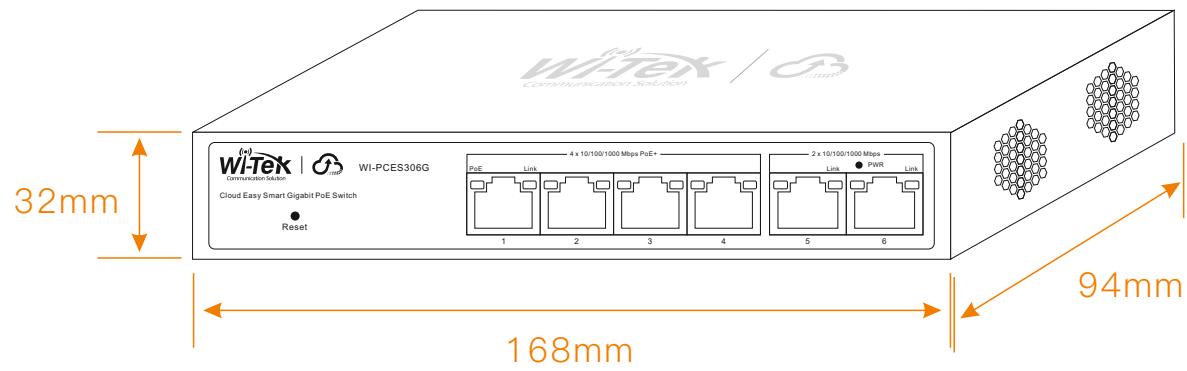

## Front Panel

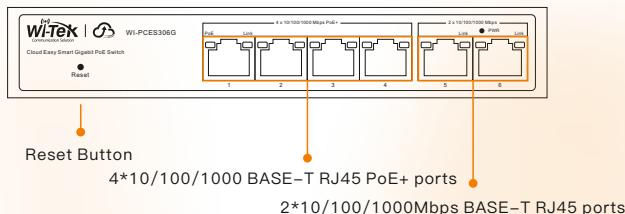


## Side Panel




## WI-PCES310GF

## Dimensions (mm)

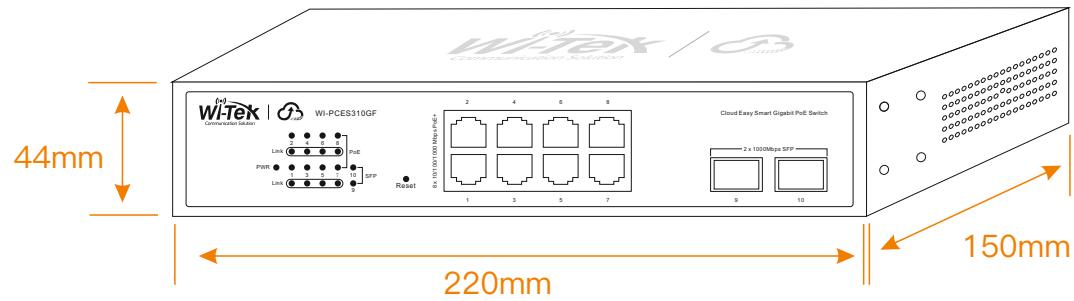

## Front Panel

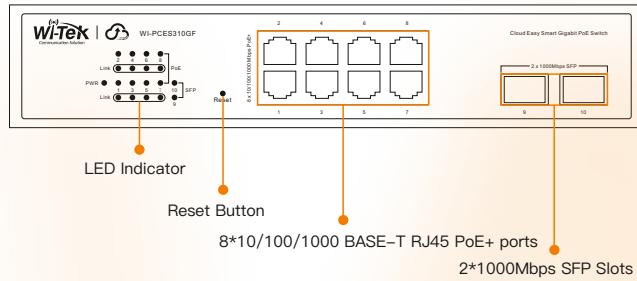


## Side Panel




## WI-PCES318GF


## Dimensions (mm)

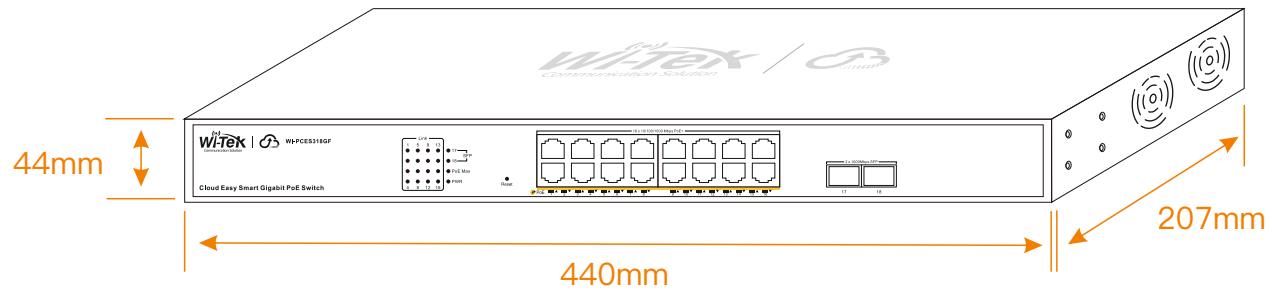

## Front Panel

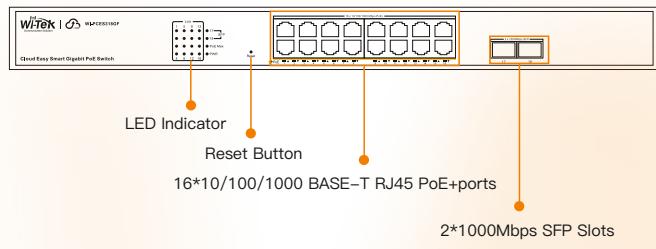


## Side Panel

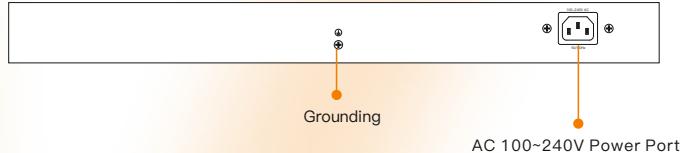


## WI-PCES326GF


## Dimensions (mm)

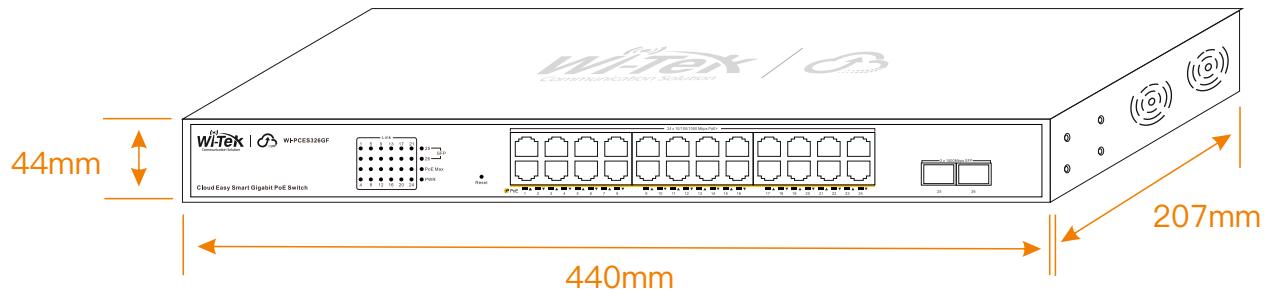

## Front Panel

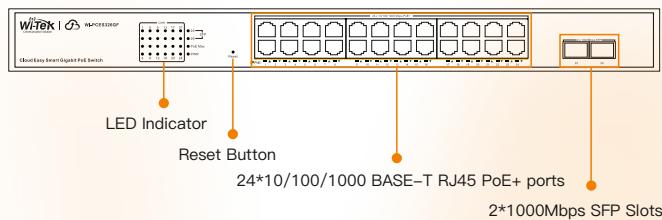

## Side Panel

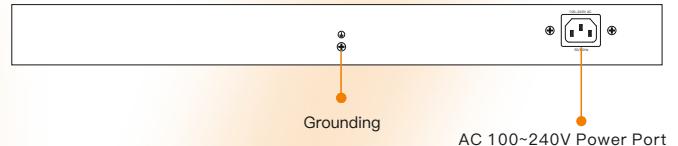

## Package Contents

Welcome to order our products. After purchasing, you will receive:

### WI-PCES306G

Items	Quantity
Switch	1 pcs
Quick Installation Guide	1 pcs
Power Cord	1 pcs
Mounting Accessories	Mat x 4

### WI-PCES310GF/WI-PCES318GF/WI-PCES326GF

Items	Quantity
Switch	1 pcs
Quick Installation Guide	1 pcs
Power Cord	1 pcs
Mounting Accessories	Hook x 2, Mat x 4, Screw x 8



Wireless-Tek Technology Limited

Address: Building 3, Units 1801–1807, 1812, Huaqiang Era Plaza, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province, China.

Website: [www.wireless-tek.com](http://www.wireless-tek.com)

Tel: 86-0755-32811290

Email: [sales@wireless-tek.com](mailto:sales@wireless-tek.com)

Technical Support: [tech@wireless-tek.com](mailto:tech@wireless-tek.com)



Technical Support



Cloud Management



Company Website